



926FE

ELECTRIC EXCAVATOR

MOTOR TYPE
MOTOR RATED POWER
STANDARD BUCKET CAPACITY
OPERATING WEIGHT

IPMSM
150 kW (201.15 hp)
1.3 m³
26,000 kg



E L E C T R I C E X C A V A T O R

TOUGH WORLD. TOUGH EQUIPMENT

926FE SPECIFICATIONS >>>

PERFORMANCE PARAMETERS

Operating Weight	26,000 kg
Std. Bucket Heaped Capacity (Referenced)	1.3 m³
Maximum Travel Speed	5.8 km/h
Swing Speed	10.5 rpm
Drawbar Pull	229 kN
Bucket Digging Force (ISO)	179 kN
Arm Digging Force (ISO)	128 kN

ELECTRIC SYSTEM


Motor Type	IPMSM
Motor Rated Power	150 kW
Working Input Voltage	AC 380V
Working Range (Recommend)	< 50 m
Cable Diameter (Recommend)	≥70 mm²
Cable Reel Cable Length	35 m /45 m
Cable Inlet Mode	Tower /Undercarrige
Cable Tower Height	4.5 m

UNDERCARRIAGE

Number of Shoes per Side	51
Number of Bottom Rollers per Side	9
Number of Upper Rollers per Side	2

DIMENSIONS

A Shipping Length	10,210 mm
B Shipping Height	3,190 mm
C Track Gauge	2,590 mm
D Undercarriage Width	3,190 mm
E Length to Center of Rollers	3,840 mm
F Track Length	4,635 mm
G Overall Width of Upper Structure	2,760 mm
H Tail Swing Radius	2,950 mm
I Counterweight Ground Clearance	1,090 mm
J Overall Height of Cab	3,020 mm
K Min. Ground Clearance	400 mm

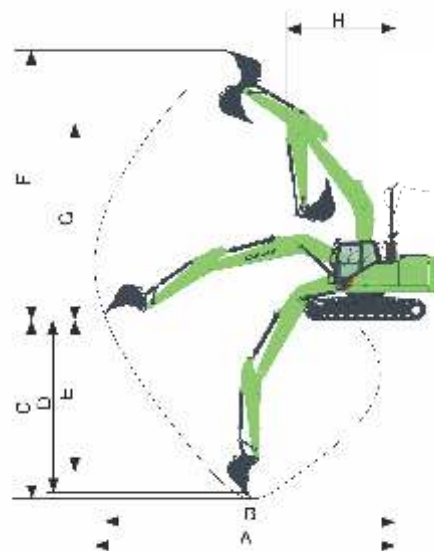

WORKING RANGE


Boom Length	6,000 mm
Arm Length	2,500 mm
A Max. Digging Reach	9,985 mm
B Max. Digging Reach on Ground	9,800 mm
C Max. Digging Depth	6,380 mm
D Max. Digging Depth, 2.44 m (8') Level	6,185 mm
E Max. Vertical Wall Digging Depth	5,655 mm
F Max. Cutting Height	9,875 mm
G Max. Dumping Height	7,000 mm
H Min. Front Swing Radius	3,430 mm

HYDRAULIC SYSTEM

Main Pumps Total Flow	2 x 254 L/min
Relief Pressure, main	34.3 MPa
Relief Pressure, boost	37.3 MPa

SERVICE CAPACITIES

Cooling System	20 L
Hydraulic Reservoir	133 L
Hydraulic System Total	245 L

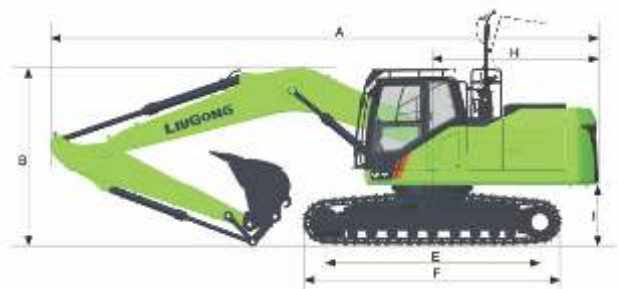

Corporate office
LiuGong India Pvt. Ltd.
 101, Okhla Industrial Estate, Phase III
 New Delhi- 110020
 Tel.: 011- 47272200
 www.liugong.com
 india@liugong.com

Plant Address:
 Plot No. 163, Industrial Area,
 Sector - III, Pithampur,
 Dist. - Dhar, Madhya Pradesh - 454774
 Tel.: 07292-416700

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

LIUGONG CARE
1800 1033 852

06/2025 LIPL